

CI/SfB		Yw7
CAW P22	Uniclass L69:P99	

Description

AT120 is a cleaner/primer for silicones that cleans and primes in one operation.

Packaging


500 ml tin (12 per box)

Colour

Transparent

Technical Information

Property	Classification
Consistency	Thin liquid
Drying Time	20 minutes
Application of Sealant	In all cases, ensure the primer is dry before applying the sealant
Storage	Store in dry shaded conditions between +5°C and +25°C.
Shelf Life	12 months when stored as recommended in original unopened packaging.

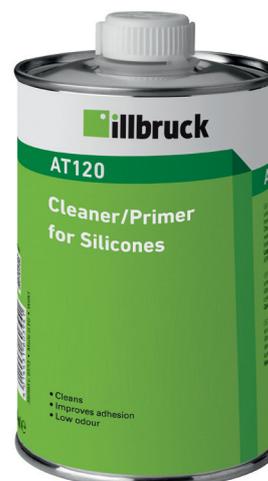

Protective Equipment

USE IN WELL VENTILATED CONDITIONS and ensure all recommended protective equipment is worn during handling & use of this product. For full recommendation, refer to safety data sheet.

Application

- Apply a thin coat of AT120 using a cloth or felt pad.
- Only use the necessary quantity and allow surface liquid to evaporate.
- Close the container immediately after use and protect from humidity.
- Drying time will be increased in lower temperatures and decreased in higher temperatures, and will also depend on humidity. The time indicated in the technical information table above is based on +23°C & 50% RH.
- Consumption will vary depending on depth of the joint.
- Quickly remove any spilt primer with a cloth.
- For confirmation of primer requirements on different substrates, please consult primer table on the specific sealant data sheets.
- It is recommended to test a small area first before proceeding with the full application.

Health & Safety Precautions

Safety data sheet must be read and understood before use.
Highly flammable- keep away from open flames and other ignition sources.

Technical Service

Tremco CPG UK Limited has a team of experienced Technical Sales Representatives who provide assistance in the selection and specification of products. For more detailed information, service and advice, please call Customer Services on 01942 251400.

Guarantee / Warranty

Tremco CPG UK Limited products are manufactured to rigid standards of quality. Any product which has been applied (a) in accordance with Tremco CPG UK Limited written instructions and (b) in any application recommended by Tremco CPG UK Limited, but which is proved to be defective, will be replaced free of charge.

No liability can be accepted for the information provided in this leaflet although it is published in good faith and believed to be correct.

Tremco CPG UK Limited reserves the right to alter product specifications without prior notice, in line with Company policy of continuous development and improvement.

AT120

Cleaner/Primer for Silicones

Usage / Purpose

AT120 Primer is suitable for cleaning and improving the adhesion of weathertight sealants to a range of non-porous substrates.

Key Benefits

- Ideal for cleaning/priming prior to the application of illbruck silicone sealants
- For use on non-porous substrates



Construction Products Group

Tremco CPG UK Limited
Coupland Road
Hindley Green, Wigan WN2 4HT
United Kingdom
T: +44 1942 251400
F: +44 1942 251410

info.uk@tremcocpg.com
www.tremcocpg.eu